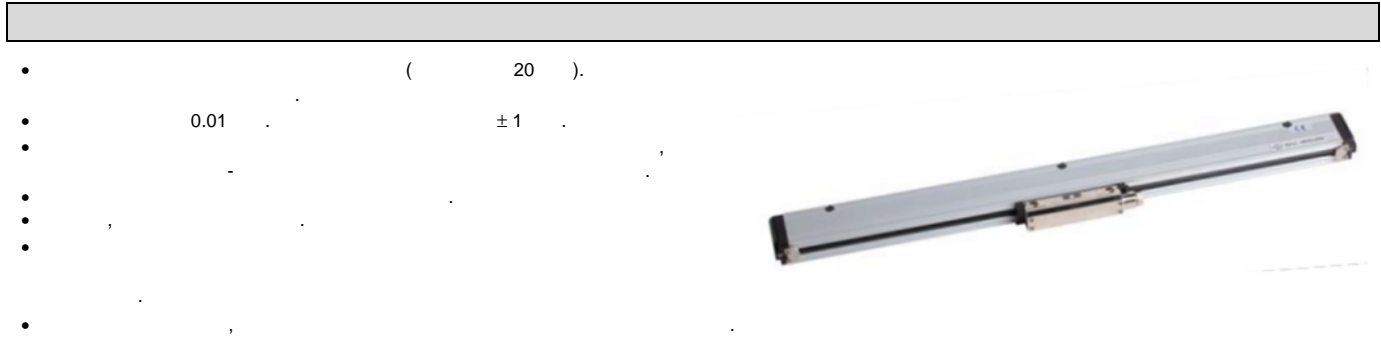




ST04	A54-A	A	
-------------	--------------	----------	--

GVS 600 T (TTL)



		Cod. GVS 600	T
: 40x24			20 
<0.2			$8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$
(l ₀)		C =	-
		P =	(40)
		E =	(20)
			5 - 1 - 0.5 - 0.1 - 0.05 - 0.01
			± 3 *
			± 1 *
ML			70, 120, 170, 220, 270, 320, 370, 420, 470, 520, 570, 620, 720, 770, 820, 920, 1020, 1140, 1240, 1340, 1440, 1540, 1640, 1740, 1840, 2040, 2240, 2440, 2640, 2840, 3040, 3240 _{MAX}
			120 / **
			30 / ²
			$\leq 2.5 \text{ N}$
(EN 60068-2-6)			100 / ² [55 + 2000]
(EN 60068-2-27)			150 / ² [11 ms]
(EN 60529)			IP 54 IP 64
			0 °C ÷ 50 °C
			-20 °C ÷ 70 °C
			20% ÷ 80% ()
			⊙
			5 Vdc ± 5%
			140 mA _{MAX} (R = 120 Ω)
A, B I₀			LINE DRIVER 
			100 (LINE DRIVER) 50 (PUSH-PULL)
			435 + 1290 /

+ V	
0 V	
A	
\bar{A}	
B	
\bar{B}	
I ₀	
\bar{I}_0	
SCH	

* ± X
 ** 0.1
 0.05
 0.01

1 .
 48 / .
 24 / .
 4.8 / .

